
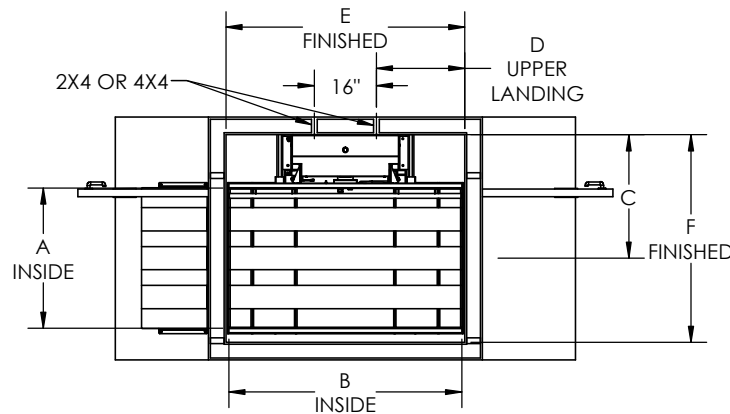


ANCHOR
LOCATIONS
-4 PLACES



Specifications

Model: VL19

Rated Load: 750 lbs

Drive: Dual winding cable drums / 24 VDC
500 watt motor w/brake

Supply Power: 120 VAC 15A

Operating Power: 24 VDC (DUAL 12V 10AH BATTERIES)

Control Power: 5 VDC

Platform: 36" x 48" (36" x 54") (36" x 60")
(42" x 54") (42" x 60")

Lift Height: 1" - 144"

Speed: 15-18 fpm

Controls: Constant pressure

Safety Standards: ASME A18.1, Section 2

CSA B44.1/ASME A17.5

Safety Features: Safety pan, final limit, slack cable brake,
emergency stop w/alarm

DIMENSIONS AND SPECIFICATIONS SUBJECT TO CHANGE

**DESIGNED TO COMPLY
WITH ANSI A18.1 PART 2
WHEN PROPERLY INSTALLED**

PLATFORM SIZE	A	B	C	D	E	F
36X48	36-1/8	48	31-13/16	16-3/4	49-1/2	53-1/2
36X54	36-1/8	54	31-13/16	16-3/4	55-1/2	53-1/2
36X60	36-1/8	60	31-13/16	22-3/4	61-1/2	53-1/2
42X54	42-1/8	54	34-13/16	16-3/4	55-1/2	59-1/2
42X60	42-1/8	60	34-13/16	22-3/4	61-1/2	59-1/2

120VAC INLET
(EITHER SIDE)

TOWER
HEIGHT

BATTERY DISCONNECT
/ CIRCUIT BREAKER

36X80 FLUSH
DOOR WITH
INTERLOCK

GRAB RAIL

CONTROLS

FIXED
RAMP

36X80 FLUSH
DOOR WITH
INTERLOCK

X
LIFTING
HEIGHT

MODEL	X	Y
PLH-048	48	93-1/16
PLH-072	72	117-1/16
PLH-096	96	141-1/16
PLH-120	120	165-1/16
PLH-144	144	189-1/16

4" THICK 3500PSI
STEEL-REINFORCED
CONCRETE PAD



Staying Home Corporation
2501 Anaconda Rd
Harrisonville, MO 64701
816-380-2427
www.stayinghome.com

TITLE: PLATFORM LIFT - HOISTWAY
STRAIGHT THRU

SIZE B	DWG. NO. TYP-PLH-ST	REV 11/29 2021
SCALE:	WEIGHT:	SHEET 1 OF 1

